

# MAXICHARGER DC COMPACT

## DC Charger

Introducing the MaxiCharger DC Compact, a game-changer in the world of electric vehicle charging. This ultra-compact charger delivers substantial DC power in a small, space-saving package, making it ideal for a wide range of locations.

### Fast and Effective

Built to increase charging efficiency, our charger is designed to get you back on the road quickly.

### Dual Ports

With dual ports providing up to 47kW of power, you can charge two vehicles simultaneously, saving you time and energy.

### Rapid Charging

Achieve up to 130 km of range in just 30 minutes, ensuring you're always ready for your next journey.

### Ultra-Compact Design

Experience the power of DC charging in a sleek and compact design.

### Flexible Installation

Choose between fixed or mobile positioning to adapt to your specific needs, ensuring convenience and versatility.

### Low Installation Costs

The DC Compact is designed to minimize installation expenses, offering a faster return on investment (ROI) for site operators.

### DC Output Connection

Charging Mode	Mode 4: CCS2
Output Power	Rated power 40kW (Max. 47kW)
Output Voltage	150~950V
Max Output Current	133A
Number of Outputs	2*CCS2, 1*CCS2+1*CHAdeMO 1*CCS2
Peak Efficiency	≥96%

### General Characteristics

IP and IK Rating	IP54; IK10
Operating Altitude	2000m
Operating Temperature Range	-30°C~+55°C
Storage Temperature Range	-40°C~+70°C
Mounting	Pedestal or wheels
Dimensions (H x W x D)	1000 x 550 x 265 mm
Screen Type	21.5 inch LCD Touch Screen (1920*1080)
Cable Length	Cable Length 4m Standard; 5m (Optional)

### AC Input Connection

Earthing System	3P, N, PE
Input Voltage	3-phase 400V AC f10%
Input Frequency	50Hz
Power Factor	≥0.99
Harmonic distortion (THDi)	≥5%

### User Interface


Status Indication	LED/LCD/APP
User Interface	Autel Charge APP Autel Charge Cloud
Connectivity	4G, Wi-Fi, Ethernet
Communication Protocols	OCPP 1.6J (Can be Upgraded to OCPP 2.0.1 Later)
User Authentication	APP, RFID Card

### Certification and Specifications

Safety and Compliance	IEC 61851-23 IEC 61851-21-2 ISO 15118
Certification	CE, EMC Class A
Warranty	24 months Warranty Extension Possible

### Software Update

Software Update	OTA Updates via Web Portal
-----------------	----------------------------

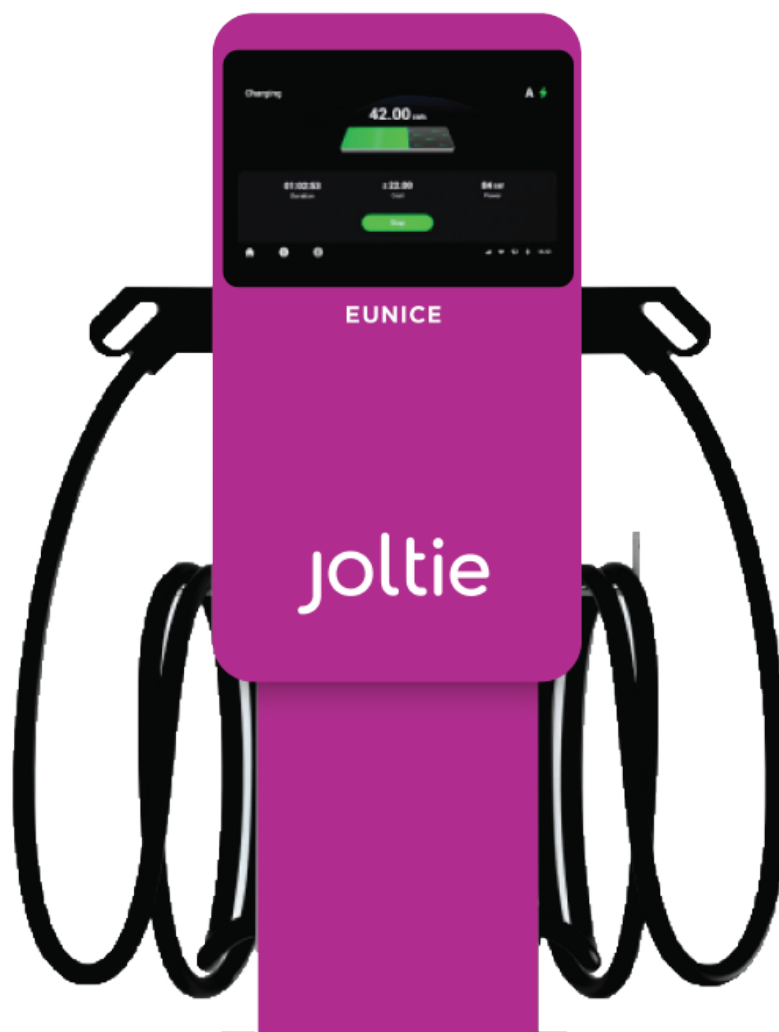

# joltie

Joltie Hellas  
Chimarras 5, 15125, Marousi, Attica, Greece  
Tel.: +30 210 3242020, Fax: +30 210 3242023  
Production Unit: Evnikis 10, 19600, Mandra, Attica, Greece  
[info@eunice-group.com](mailto:info@eunice-group.com)  
[www.eunice-group.com](http://www.eunice-group.com)